


TRIVEL

INSTRUCCIONES
DE MONTAJE


HIDROBI COVERS

DOBLE


TRIVEL053 03/24

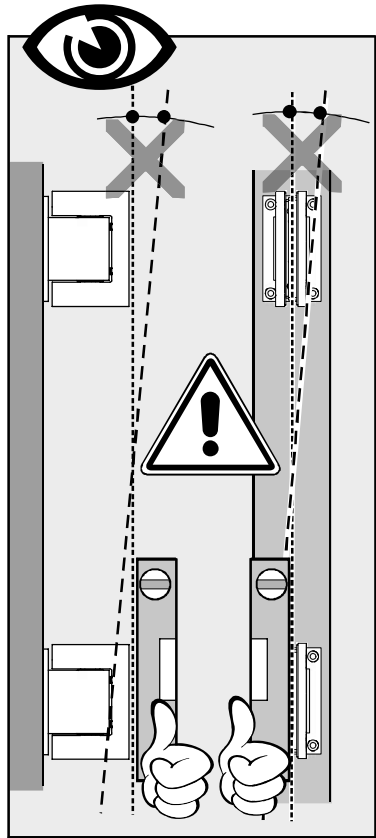


1

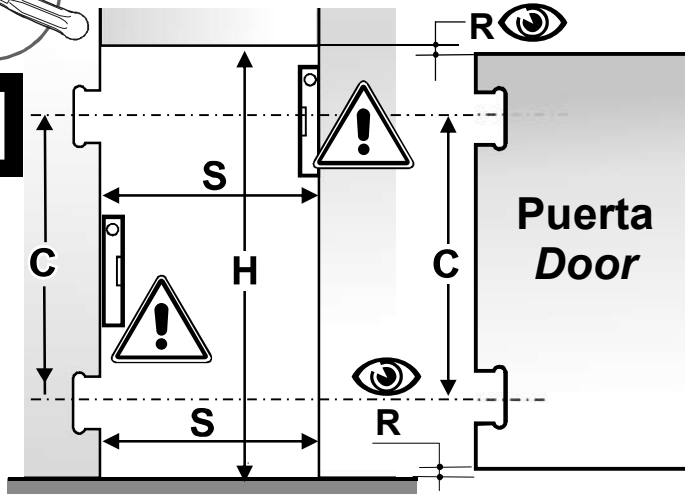


2

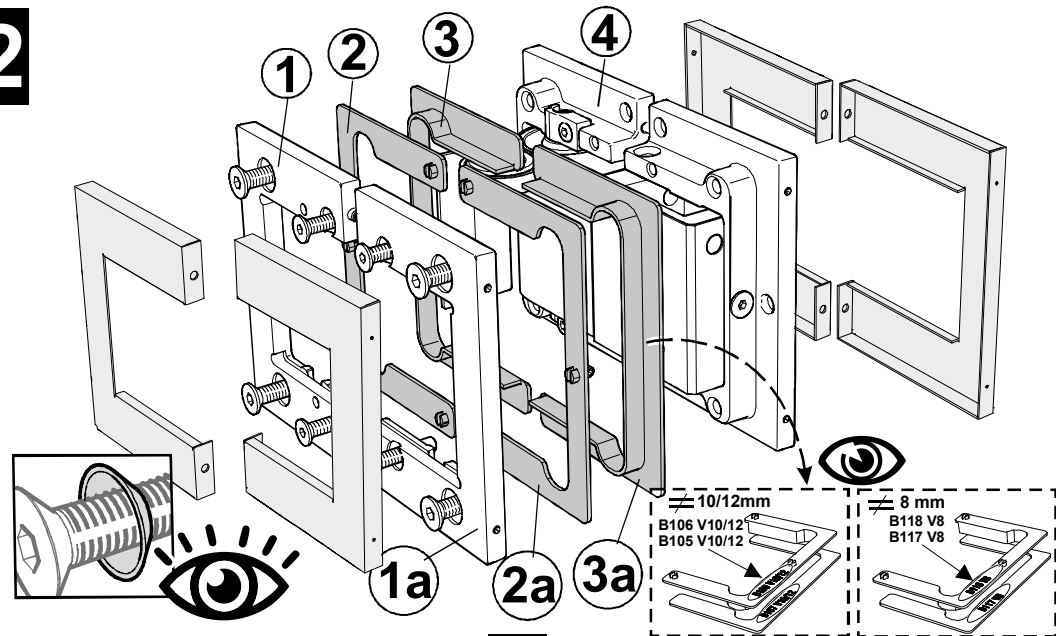


3

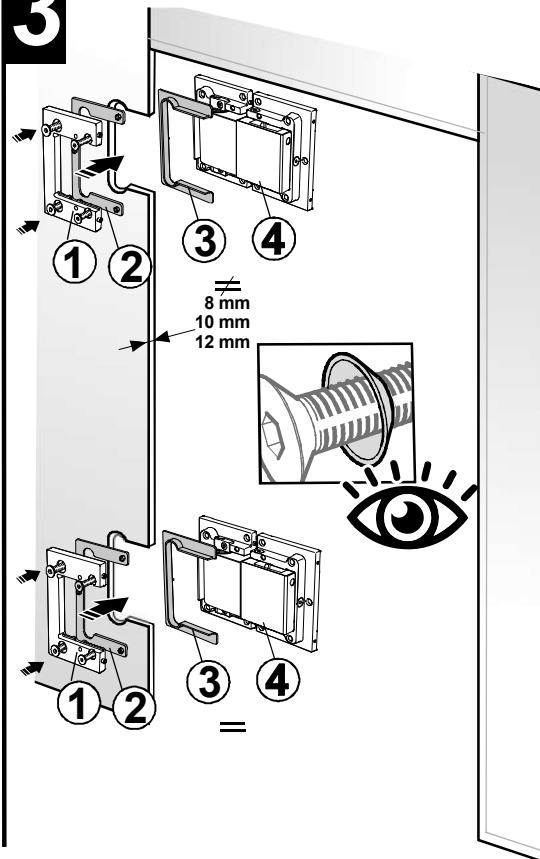

4







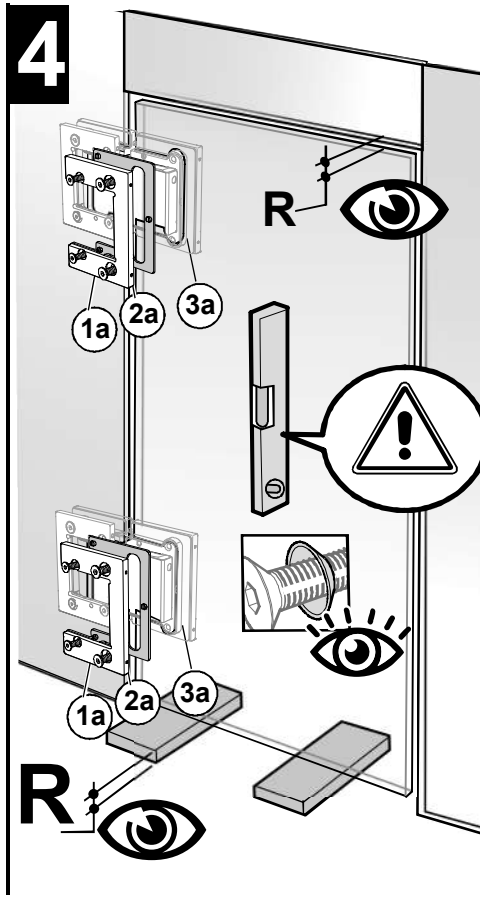



5

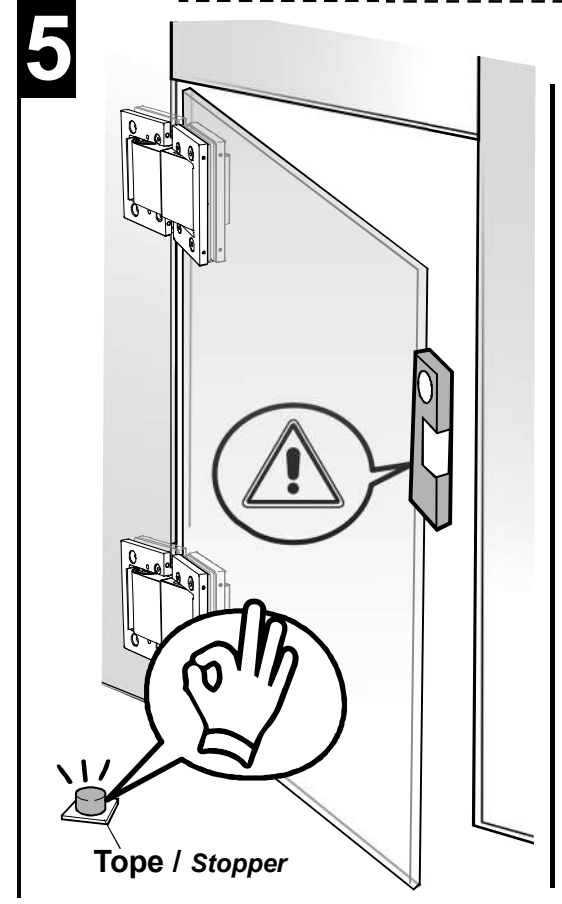

Tope / Stopper

ALINEACIÓN/ALIGNEMENT

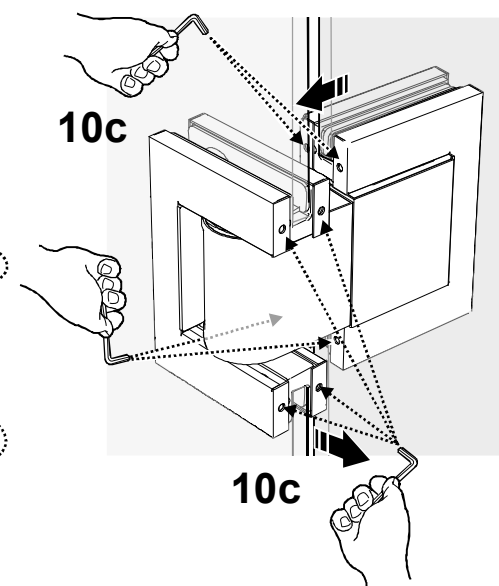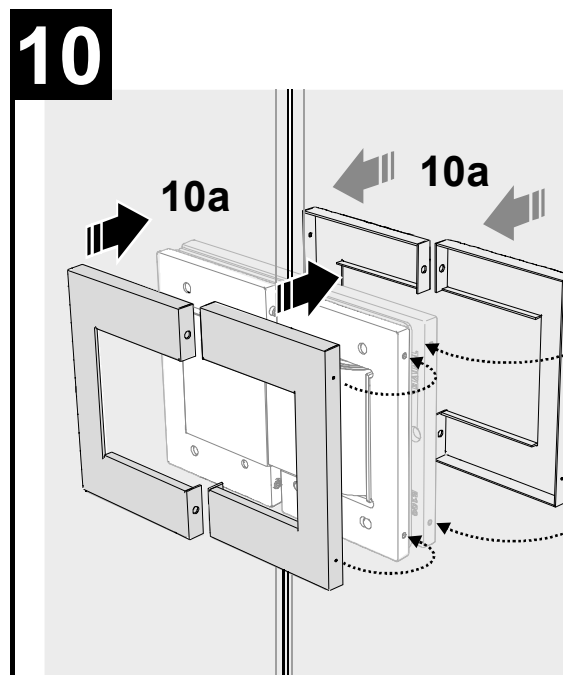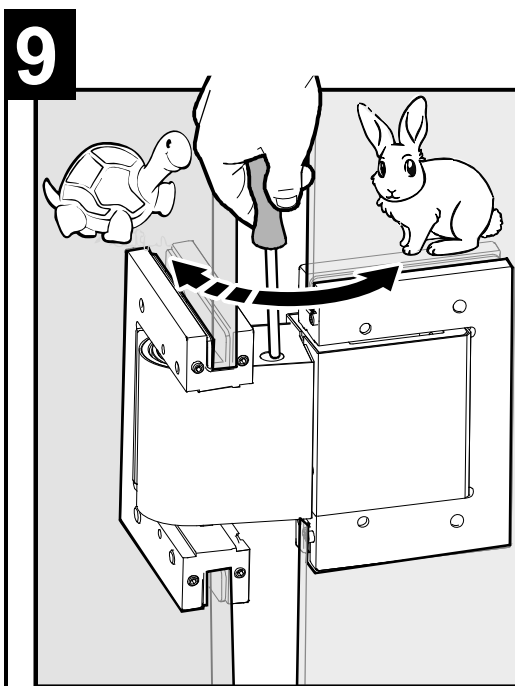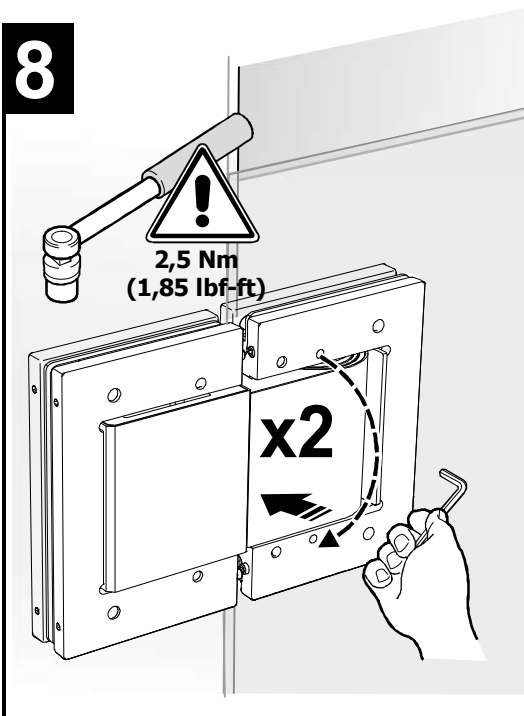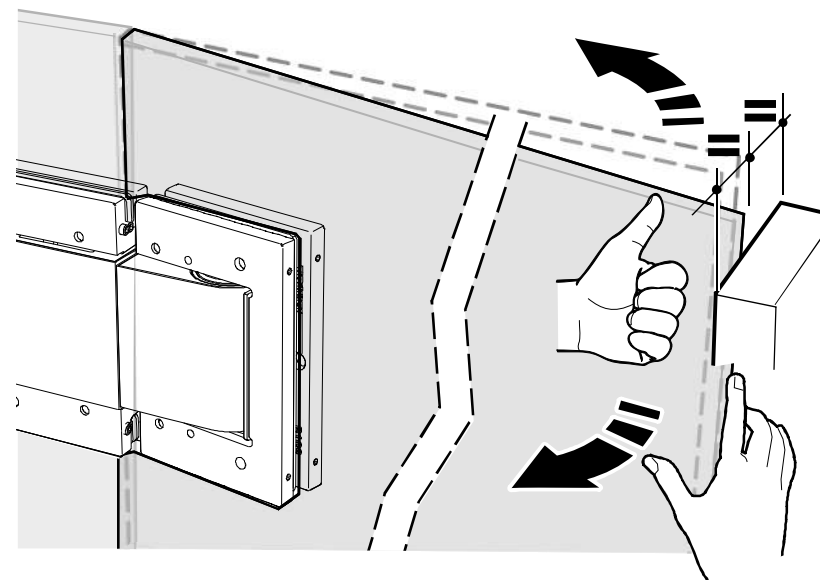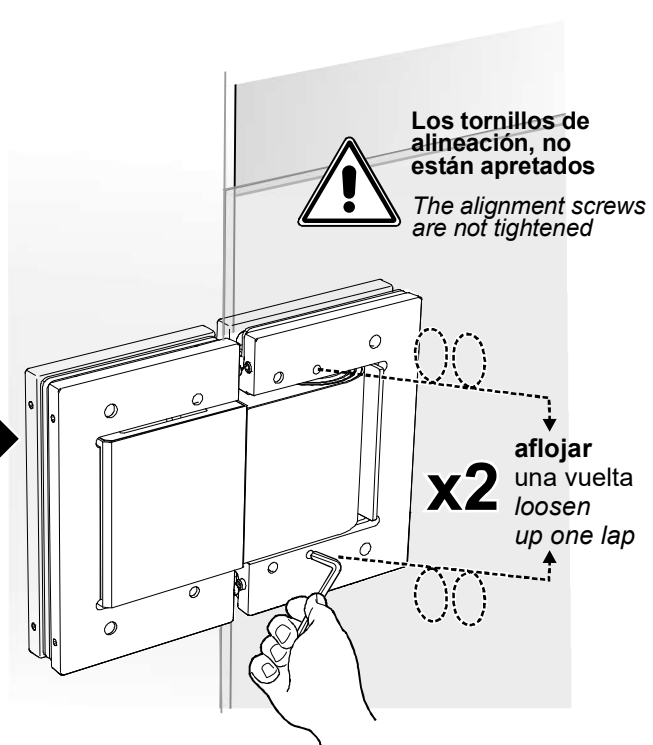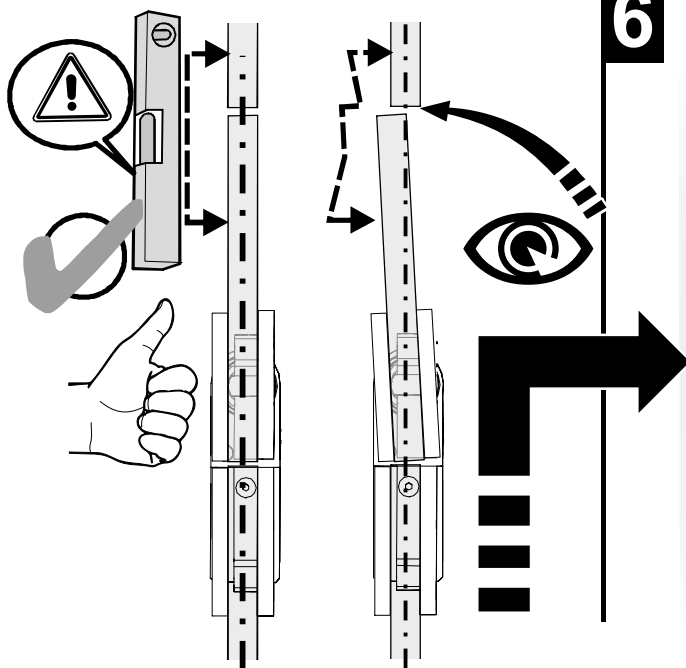




TRIVEL

Sugerencias para la
colocación de las bisagras,
según dimensiones de la
puerta


HIDROBI

TRIVEL014 06/23


Para puertas con una altura máxima de
1200mm y ancho máximo de 1000mm
y grueso de vidrio de 8/10/12mm

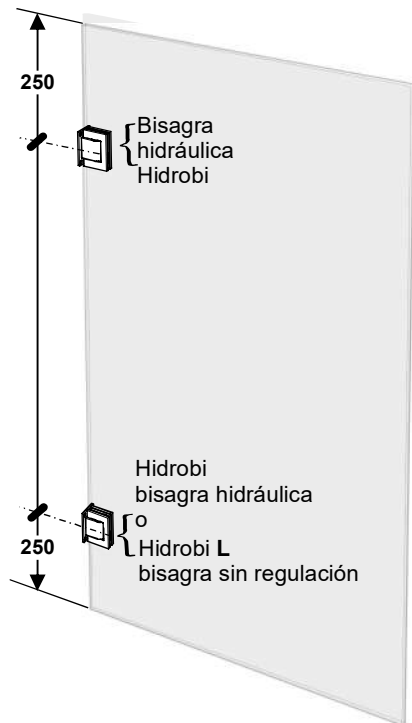


Para puertas con un peso inferior
a 70 Kg

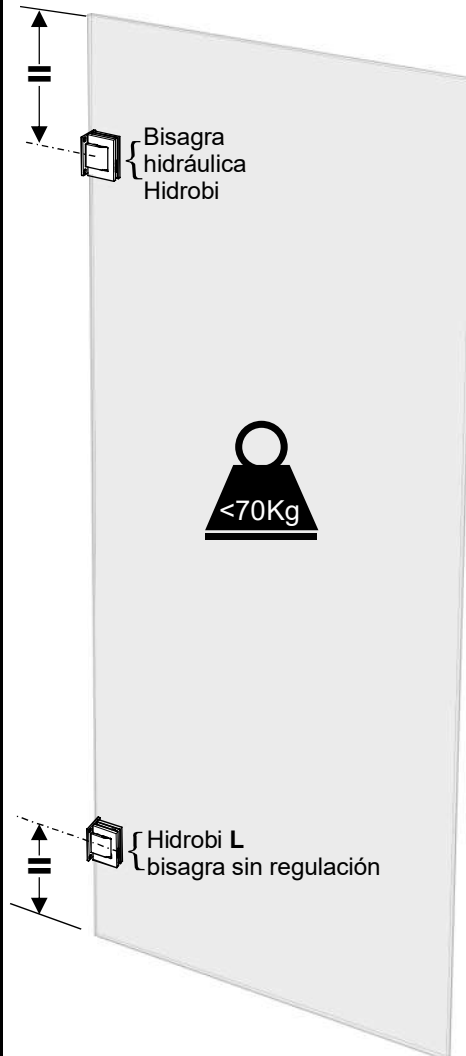


Para puertas con una altura máxima de
3000mm o ancho máximo de 1000mm
y grueso de vidrio de 8/10/12mm

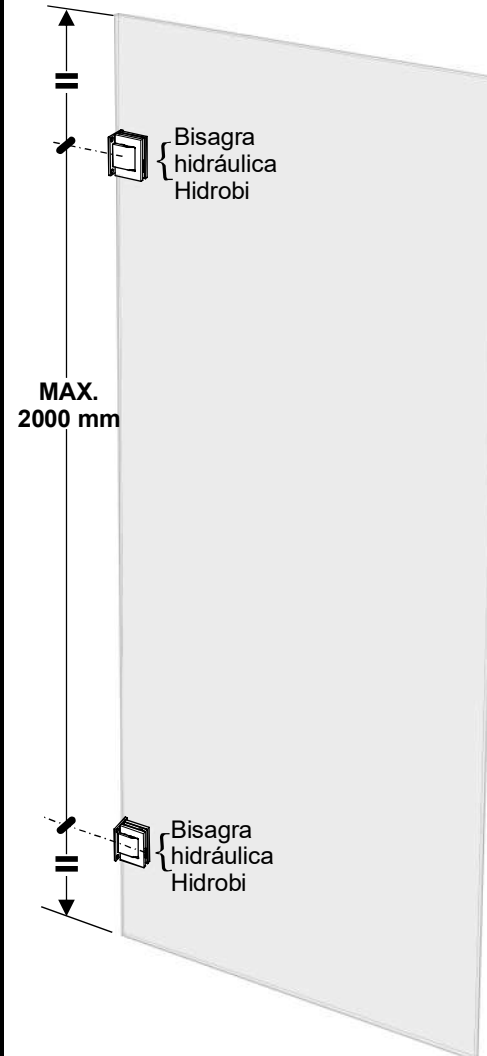

Para puertas con altura máxima de
3000mm hasta 3500mm y ancho
máximo de 1000mm hasta 1200mm y
grueso de vidrio de 8/10/12mm

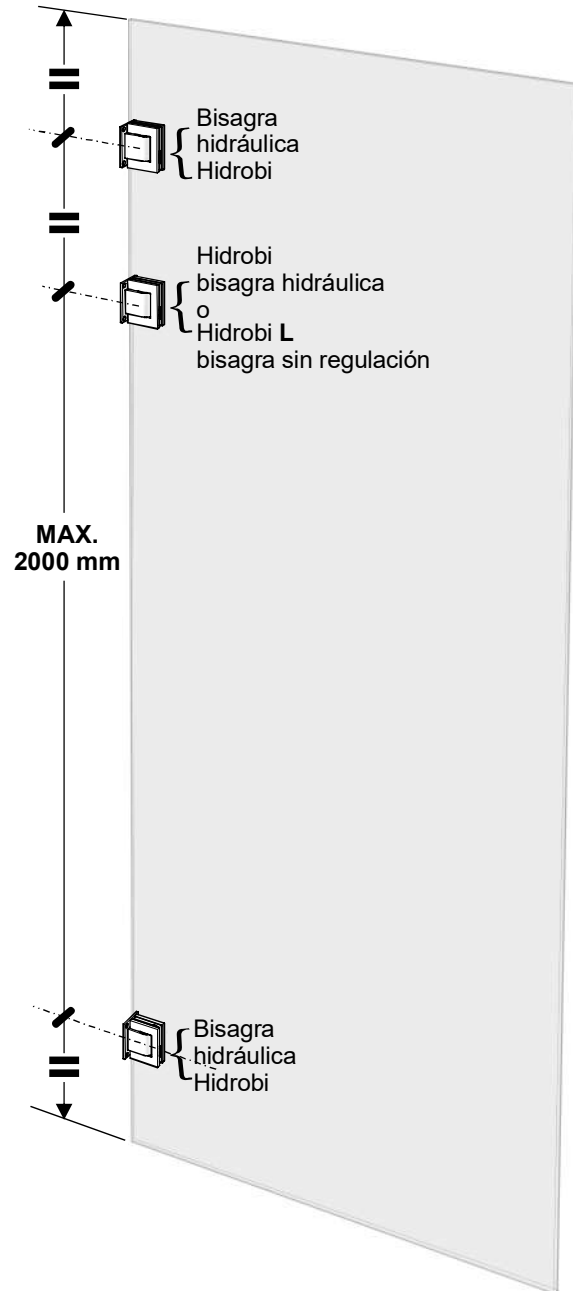





TRIVEL
Installation recommendations
for different types of
glass door sizes

HIDROBI
TRIVEL014 06/23


Glass doors with maximum height
1200mm and maximum width 1000mm
And glass thicknesses 8 /10/12mm.

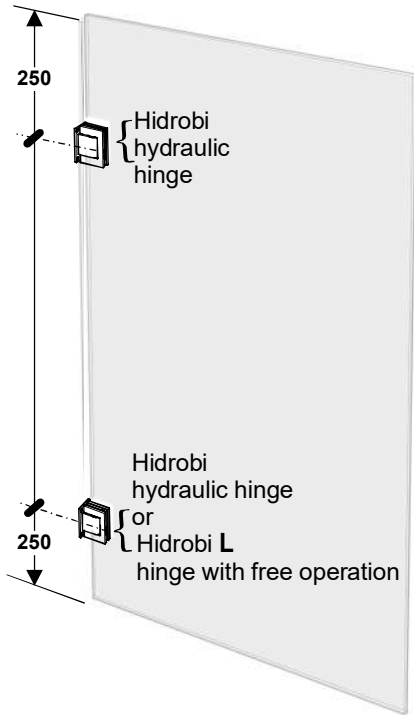

Glass door with a maximum weight
of 70 kg

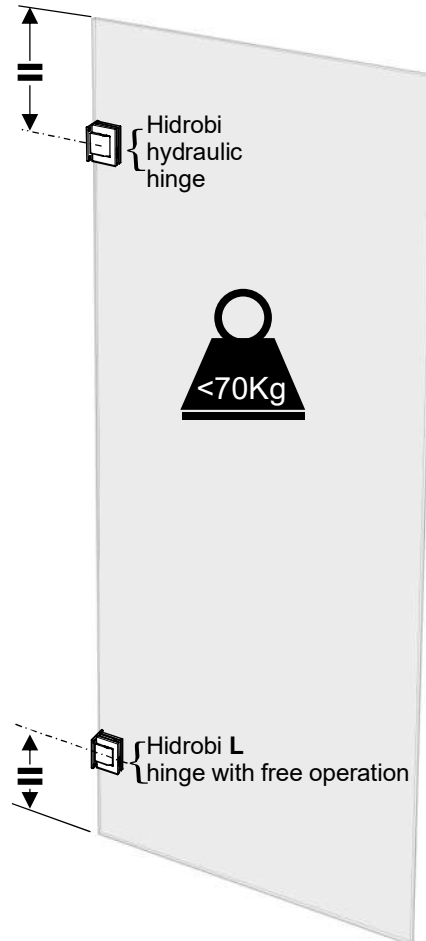

Glass doors with maximum height
3000mm or maximum width 1000mm
And glass thicknesses 8 /10/12mm.

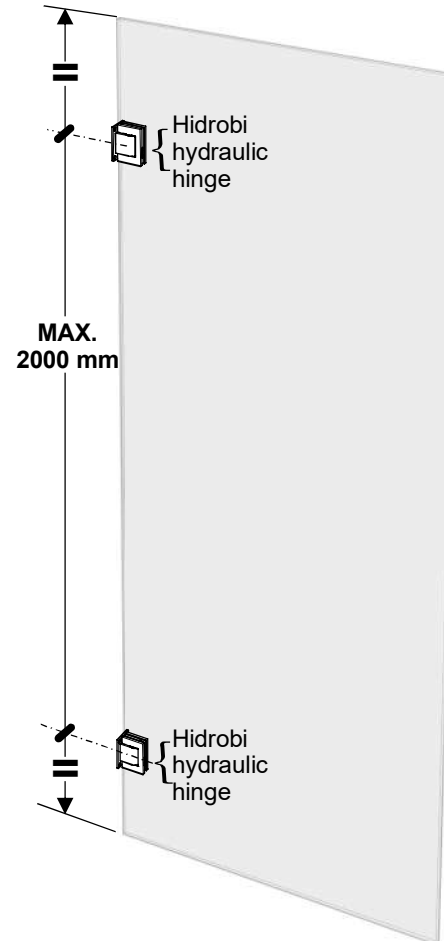

Glass doors with maximum height
from 3000mm to 3500mm and
maximum width from 1000mm to
1200mm.
And glass thicknesses 8 /10/12mm.

